



Unparalleled Delivery Performance

SP-10G Data Sheet

Flow Versus Pressure

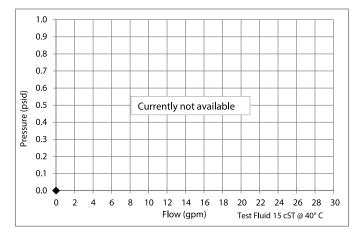

Average Filtration Efficiency



General Construction and Operating Conditions


Media	10µ Microglass	
Max. Working Pressure	rking Pressure 175psi	
Max. Flow Rate	22gpm	
Terminal Differential Pressure	ure 25psid	

Reference Performance Values

$B_{<4}$	= 2	B_4	= 3.15
$B_{_{6.6}}$	= 10	B_6	= 7.22
$B_{_{9.9}}$	= 75	B ₁₄	= 20.2
B _{10.4}	= 100		
B _{11.4}	= 200		

Retention Capacity - N/A

Reference Dimensions

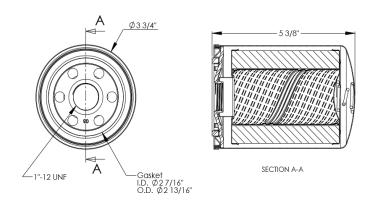

Products are not to be used in aviation applications. All product data and statements are indicative of typical properties and characteristics obtainable. This data sheet is to be used as a guide and not as a specification sheet. Ohio Fabricators Company makes no representation or warranty except as otherwise noted. Technical data subject to change without notice.