


Hose Barb Tank Mount Suction Strainers

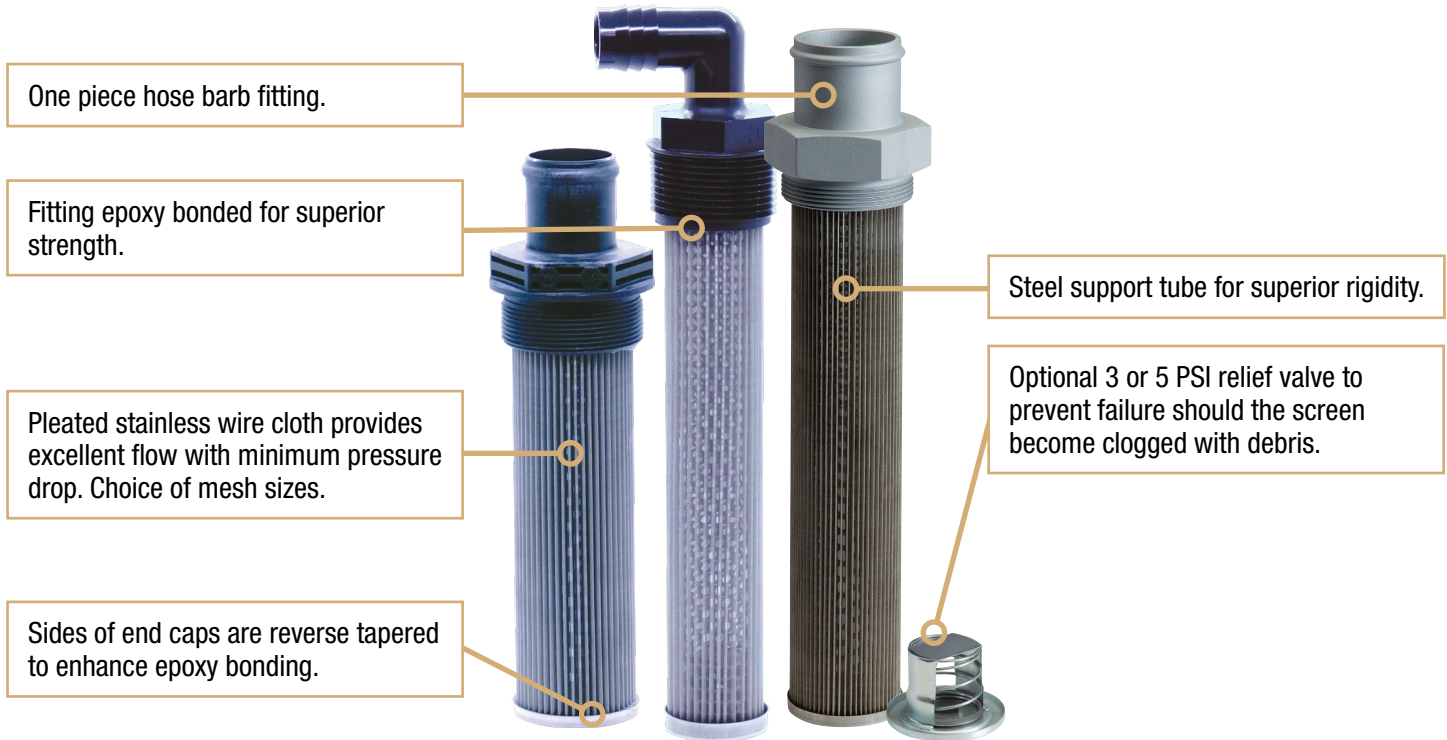

Benefits

- One piece fitting
- Epoxy bonded stainless steel pleated screen
- Flow rates to 100 gpm
- Perforated steel support tube
- Fittings available in aluminum, plastic or steel

Features

A Hose Barb tank-mounted strainer is installed through a tank top and may be removed for servicing without draining the tank. These tank-mounted strainers and fittings are designed for use with soft tubing and high pressure. The hose barb connection allows for a more forgiving assembly and is being used more and more in first stage design by original equipment manufacturers. OFCO can take your OEM custom design and provide products to meet your customer needs with rapid response and first article testing.

Options

- 3 or 5 PSI bypass
- Custom sizes, screens and adapters