

Male to Male NPT Tank Mount Suction Strainers

TMN Series

- Cast Iron or Zinc Plated Steel Bushing
- Flow Rates up to 50 GPM
- Steel support tube for superior rigidity
- Pleated stainless steel wire mesh
- Option 3 PSI and 5 PSI relief valves
- Sides of end caps are reverse tapered to enhance epoxy bonding.

Sides of end caps are reverse tapered to enhance epoxy bonding.


Pleated stainless wire cloth provides excellent flow with minimum pressure drop. Choice of different mesh sizes.

Steel support tube for superior rigidity.

Bushing epoxy bonded for superior strength.

One piece male to male NPT bushing.

Optional 3 or 5 PSI relief valve to prevent failure should the screen become clogged with debris.

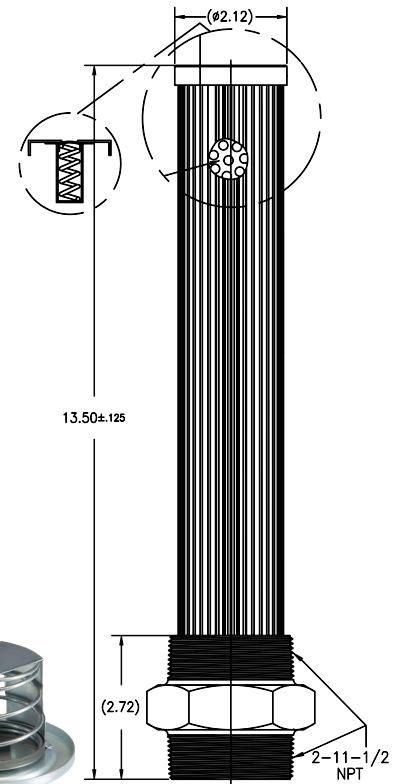

Part Number	NPT Threads	Mesh	Bushing Height	Hex Size	Diameter
TMN-2x2-XXX	2x2	13.50	2.72	2.75	2.12

All dimensions are in inches and for reference only.

How to Order: TMN-2x2 in a 3 PSI relief valve

Part Number	Mesh	Relief Valve*
TMN-2x2-XXX	30	RV3**
TMN-2x2-30-RV3		
*If no relief valve is required, leave blank		
**Relief valve comes in 3 PSI or 5 PSI version		

Filter Mesh: 100 Mesh is Standard

Mesh Suffix XXX	Mesh Opening Microns	Open Area (%)
200	69	29
100	155	36
60	300	41
30	681	64